



Trailer Mounted Concrete Pump

"Our Pride ... Your Solution"



CPS (International) Ltd

Unit 6 Howe Lane, White Waltham,
Maidenhead, Berkshire, SL6 3JP, UK

T: +44 (0)118 934 3999 | E: derek@cspumps.co.uk

www.cspumps.co.uk

Technical Data


Our pride... Your solution.


CPS (International) Ltd
Unit 6 Howe Lane
White Waltham
Maidenhead
Berkshire
SL6 3JP, UK

T: +44 (0)118 9343 999

derek@cspumps.co.uk

www.cspumps.co.uk

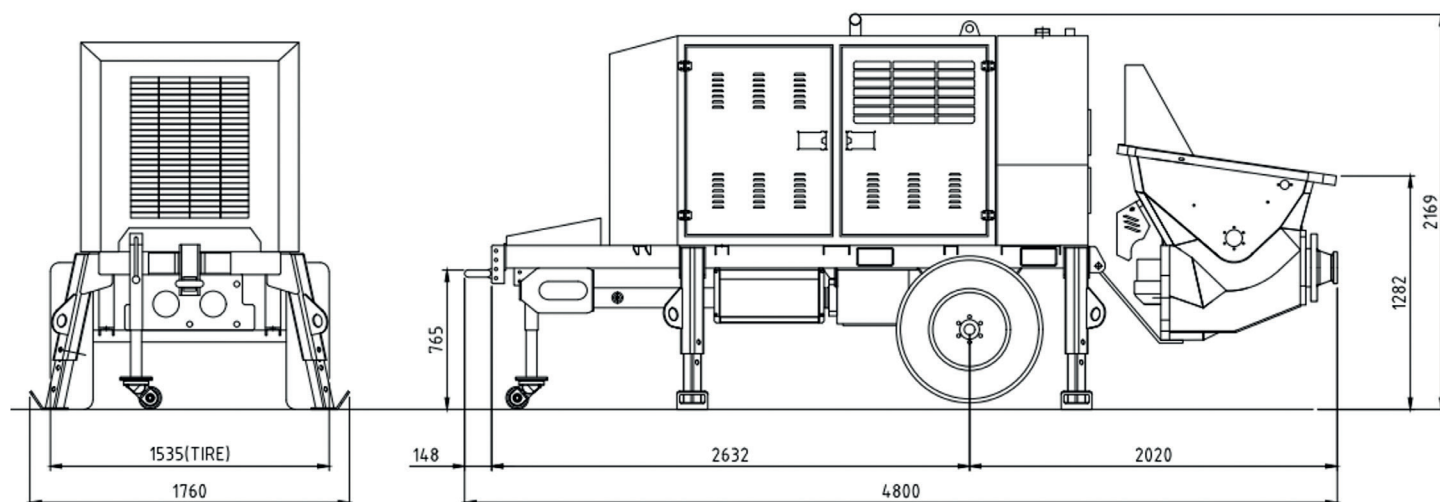

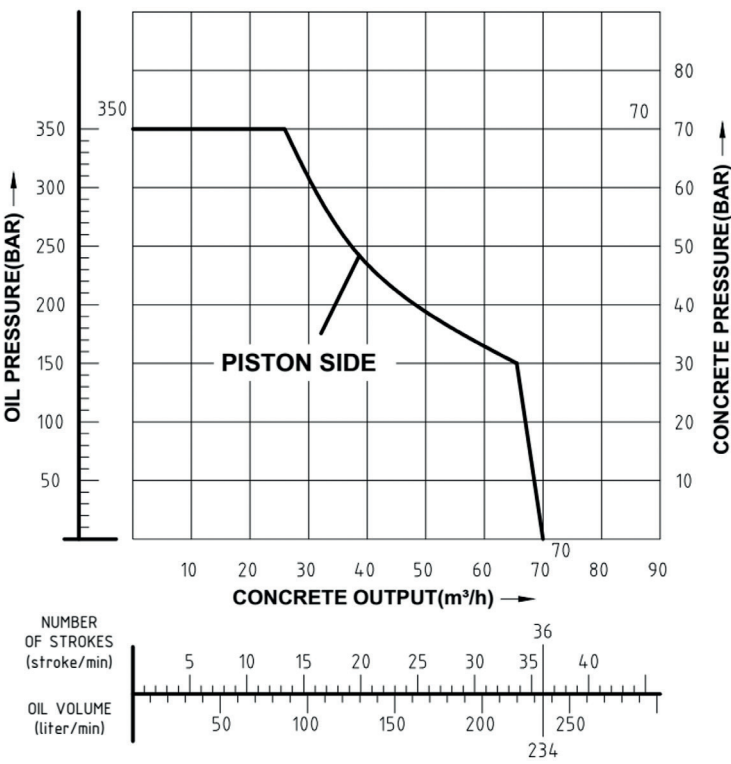Pump specifications		Performance diagram
Maximum output	Up to 70 [m ³ /h]	 PISTON SIDE OIL PRESSURE (BAR) CONCRETE PRESSURE (BAR) CONCRETE OUTPUT (m³/h) NUMBER OF STROKES (stroke/min) OIL VOLUME (liter/min)
Concrete pressure	Up to 70 [bar]	
Stroke per minute	Up to 36	
Hydraulic Cylinder	Ø90/ Ø55×1100mm	
Concrete Cylinder	Ø200×1100mm	
Concrete volume per stroke	31.4 Litres	
Hopper capacity	0.5 [m ³]	
S-tube	Ø200×Ø180mm	
Pump System	Hydraulic with Manual Override	
Hydraulic pump	KAWASAKI 117S	
Engine - EU Stage V	CAT – C3.6 (90KW/121HP)	
Engine rpm	1975 rpm	
Weight	3890 KG	

- Maximum theoretical values listed.
- Photos and drawings are for illustrative purpose only
- Right to make technical amendments reserved